



8×APL Trunk

2×10/100M BASE-T

2×100M SFP

-40℃

70℃

IP66

35mm

TP3X(2

1000

50V

57.5W)



1×APL Trunk

1×10M BASE-T

-40℃

70℃

35mm

TP3X(2

1000

50V

57.5W)



2×APL Trunk

12×APL Spur

IP66

Ex ic nA [ic Gc] IIC T4 Gc

-40℃

70℃

1000

TL3X

2

50V

57.5W

SPAC

2

0.54W

/




为

IEEE 802.3cg 10BASE-T1L(IEEE802.3cg-2019) 10Mbps
1000

“ Trunk ” “ Spur ”

IEC01158-2



10M 1000 10M


2 200

$$\frac{57.5W}{200} = 1 \frac{1}{2} \quad 0$$

0.54W


“ E ” OMC I/O I/O APL

APL “E” OMC



通用 I/O 数字 I/O

即播即用 24小时在线 多变的

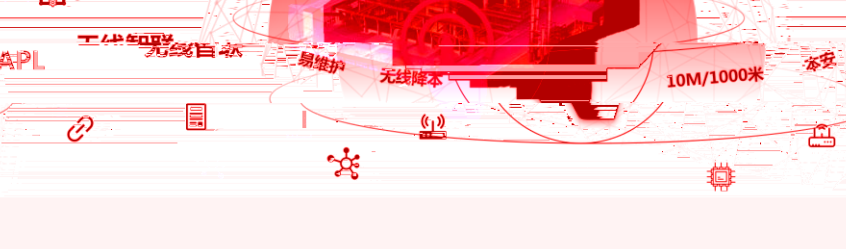

APL	TCP/IP
-----	--------

